


JET Elevatorbuckets

PRESSED STEEL

Cereals – light materials – pellets

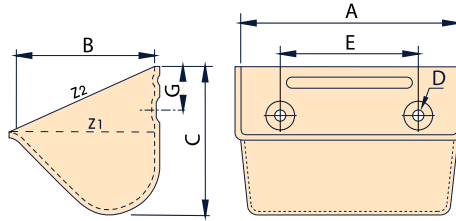


Columbus

Type	A mm	B mm	C mm	Holes			Capacity		Buckets /mtr	Weight /kg.			
				No.	D mm	E mm	Z ₂ (l)	Z ₁ (l)		1,0 mm	1,5 mm	2,0 mm	3,0 mm
COL 07-070	70	70	70	2	8	34	0,18	0,12	11,50	0,095			
COL 08-075	80	75	80	2	8	43	0,25	0,16	10	0,125			
COL 09-080	90	80	85	2	8	46	0,34	0,22	9	0,155			
COL 10-090	100	90	91	2	8	58	0,41	0,27	8,50	0,180			
COL 11-095	110	95	95	2	8	64	0,48	0,32	8	0,210			
COL 12-100	120	100	105	2	8	67	0,63	0,42	8	0,250			
COL 13-105	130	105	110	2	8	78	0,75	0,50	7	0,300			
COL 14-115	140	115	117	2	8	86	0,96	0,63	6,50	0,330			
COL 15-125	150	125	123	2	8	87	1,18	0,77	6	0,360			
COL 16-125	160	125	126	2	8	101	1,20	0,89	5,50		0,570		
COL 18-130	180	130	130	2	9	110	1,55	1,05	5,50		0,670		
COL 20-140	200	140	145	2	9	131	2,15	1,45	5		0,840		
COL 22-145	225	145	153	3	9	70	2,50	1,83	5		1,010	1,34	
COL 25-150	250	150	158	3	9	77	3,10	2,11	5		1,120	1,48	
COL 30-155	300	155	160	3	9	104	4,50	2,84	4,50		1,350	1,80	
COL 35-180	350	180	190	4	10	90	6,50	4,03	4		2,000	2,66	
COL 40-200	400	200	212	4	11	100	8,70	5,60	3			3,35	
COL 50-225	500	224	236	5	14	100	13,50	9,00	3				5,84

Subject to alterations. Columbus buckets without bottom offers on request Use domed washers.

INJECTION MOLDED PEHD WHITE/PA6 GREEN

Cereals – light materials – pellets

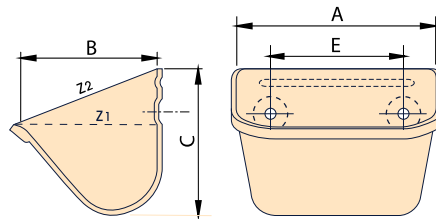

Type	A mm	B mm	C mm	Holes			Capacity		Buckets /mtr	Weight /kg.	
				No.	D mm	E mm	Z ₂ (l)	Z ₁ (l)		PEHD	PA 6
COL 08-080	80	80	78	2	8	45	0,23	0,11	10	0,035	0,045
COL 10-090	100	95	93	2	8	48	0,38	0,25	8,50	0,050	0,060
COL 12-105	120	105	105	2	8	63	0,58	0,45	8	0,072	0,090
COL 14-115	140	115	110	2	8	80	0,85	0,60	6,50	0,095	0,120
COL 16-130	160	130	120	2	8	96	1,20	0,90	5,50	0,130	0,185
COL 18-130	180	130	135	2	8	103	1,60	1,10	5,50	0,160	0,205
COL 20-140	200	140	150	2	10	118	2,00	1,35	5	0,230	0,290
COL 25-170	250	170	165	3	10	77	2,80	2,00	5	0,360	0,480
COL 32-185	315	185	170	3	11	109	4,60	3,00	4,50	0,620	0,810

NB.: Different spacing compared to Columbus steel buckets - max. temperature PEHD 50 °C - PA 6 100° C Use dome washers Subject to alterations.