
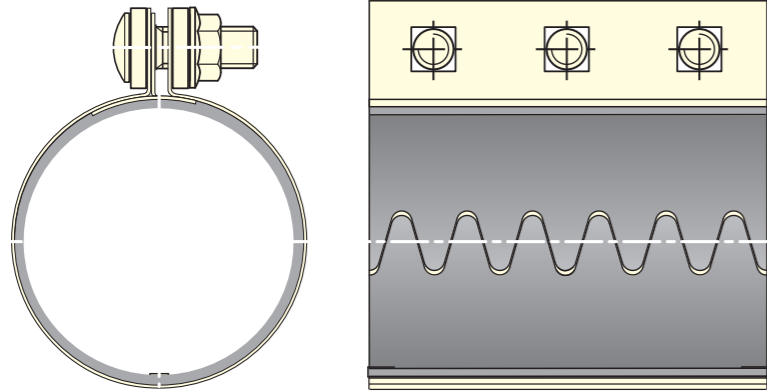


COMPRESSION COUPLINGS ARE USED IN PNEUMATIC CONVEYING, VACUUM OR PRESSURE SYSTEMS.

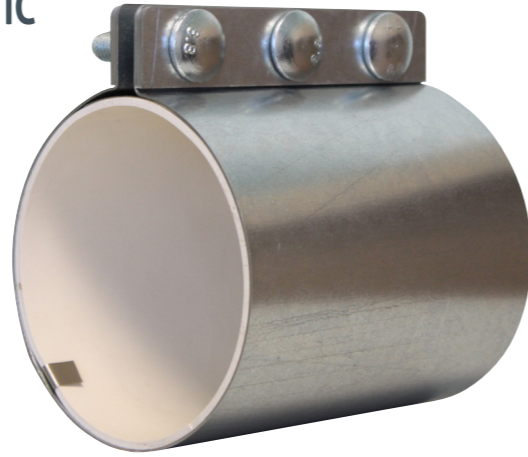

SPECIFICATION OF STANDARD COUPLING:

- Outside skin in galvanised steel
- Gasket cover in galvanised steel for $\varnothing < 193.7$ mm, and inside skin in galvanised steel for $\varnothing \geq 193.7$ mm and if $L > 200$ mm
- White NBR gasket $-30^{\circ}\text{C}/+110^{\circ}\text{C}$; European Regulation 1935/2004 CE and REACH 1907/2006 CE
- Zinc plated bolts
- Stainless steel 304 L, conductivity strip

OTHER OPTIONS:

- All stainless steel 304L version
- Black SBR gasket $-30^{\circ}\text{C}/+80^{\circ}\text{C}$
- Silicone VMQ gasket $-65^{\circ}\text{C}/+225^{\circ}\text{C}$
- Viton FPM gasket $-20^{\circ}\text{C}/+250^{\circ}\text{C}$
- Coupling with clamp and side bars (see ex.)
- Coupling for different diameters
- Conductivity strip in copper CU A1
- Conductive protection ring in stainless steel 304L (see ex.)



Reference to regulation N° 97/23/CE.G2 Art. 3 53

Product marking

Example: **EURAC[®] HL D 88,9**

L	100-150-200 mm
\varnothing	38.1<->193.7 mm
BOLTS	M12<88,9 - M16>88,9
TIGHTENING	M12: 60 N/mm

MAX. PRESSURE CURVE FOR EURAC HL100, HL150 & HL200

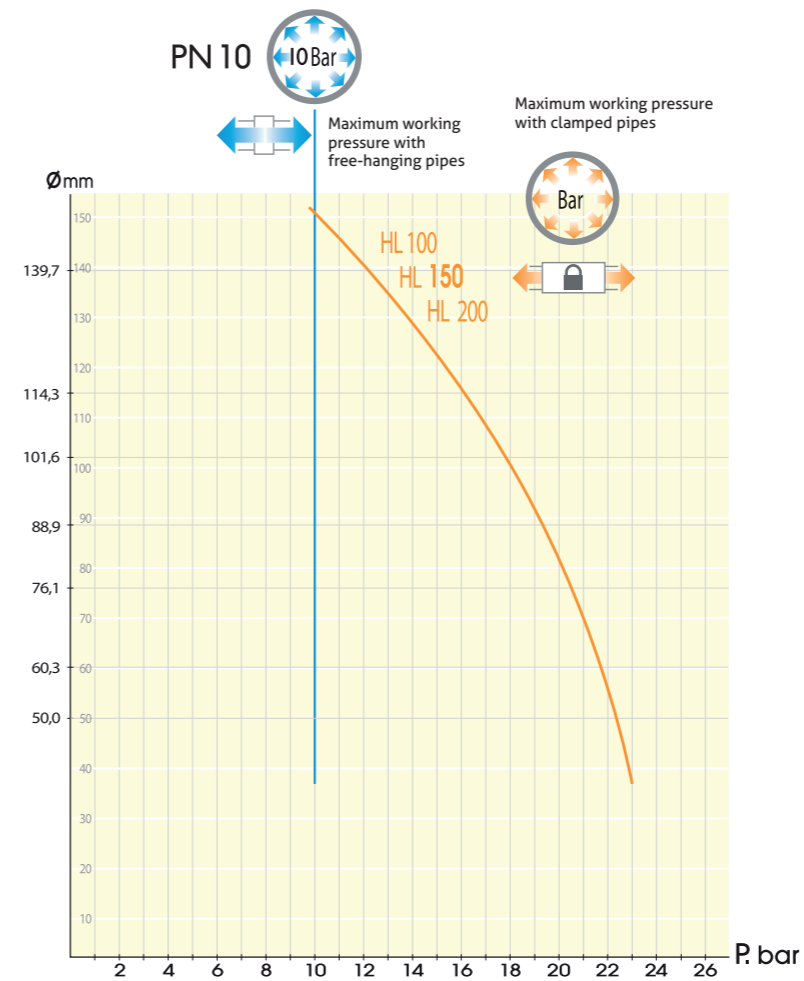

OPTIONS:

- Coupling with clamp and side bars
- Conductive protection ring in stainless steel 304L
- Coupling for two tubes with different diameters

Standard types

Order specific Other diameters can be offered

Not available

\varnothing	L 100	L 150	L 200
38,1			
40			
45			
48,3			
50/50,8			
54			
55			
60/60,3			
63,5			
65			
70			
75			
76,1			
80			
82			
84			
85			
88,9			
90			
95			
100			
101,6			
104			
105			
108			
114,3			
125			
127			
129			
133			
139,7			
145			
152,4			
154			
155			
159			
168,3			
193,7			