

SBK



SKANCROSS XE 500/3-2 4+2 OIL-GM



Antistatic acc. to EN ISO 284:2012
($\leq 3 \times 10^8$ Ohm)



Abrasion max. 200 mm³




Material temperature
-25°/+70° C (short peaks -30°/+80° C)



Ambient temperature
Min/max. -20°/+50° C / [See more](#)



Good oil resistance to materials containing
animal & vegetable oils and fats.

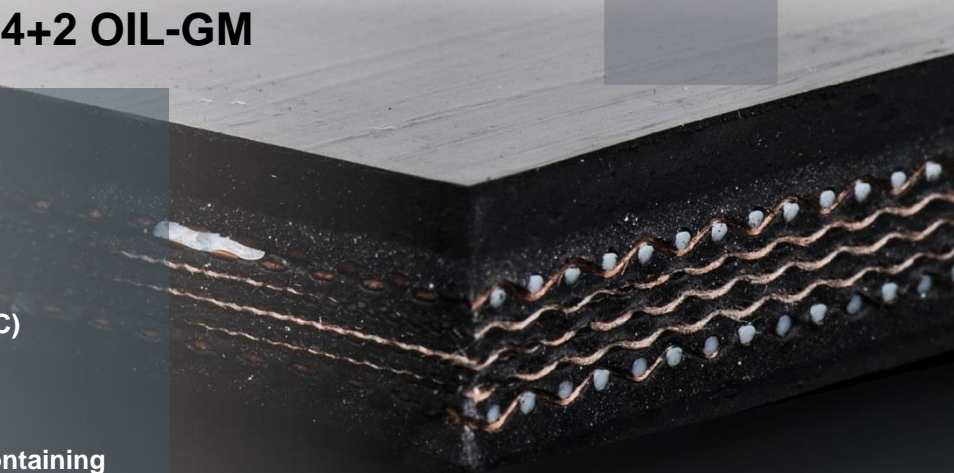

| SPECS | FACTS |
|---|-------------------|
| Tensile strength N/mm | 500 |
| Recommended max. working load N/mm | 50 |
| Covers mm | 4+2 |
| Quality designation | OIL-GM |
| Rubber quality covers | NBR/SBR |
| Rubber quality core | SBR |
| Colour | Black |
| No. of fabrics | 3 x EP/2 x EM |
| Fabric type | EP160 |
| Warp | Polyester |
| Weft | Polyamid |
| Elongation max. % | 1,5 |
| Total thickness app. mm | 12,0 |
| Weight kg/m ² app. | 12,6 |
| Min. pulley Ø 60-100% utilization of working load | 500 |
| Min. pulley Ø 30-60% utilization of working load | 400 |
| Smaller pulleys | Please contact us |

Skandinavisk Båndkompagni A/S

Birkegårdsvej 34A • DK 8361 Hasselager • Tel. +45 8734 7080 • info@sbk-belt.dk www.sbk-belt.dk

Subject to alterations.