

SBK



SKANPLY EP 400/3 4+2 OIL-GS-K



Antistatic acc. to EN ISO 284:2012
($\leq 3 \times 10^8$ Ohm)



Abrasion max. 150 mm³



Material temperature
-20°/+80° C (short peaks -30°/+90° C)




Ambient temperature
Min/max. -20°/+50° C / [See more](#)



Excellent oil resistance to materials containing
animal, vegetable & mineral oils and fats.



Flame resistant acc. to ISO340 "K"

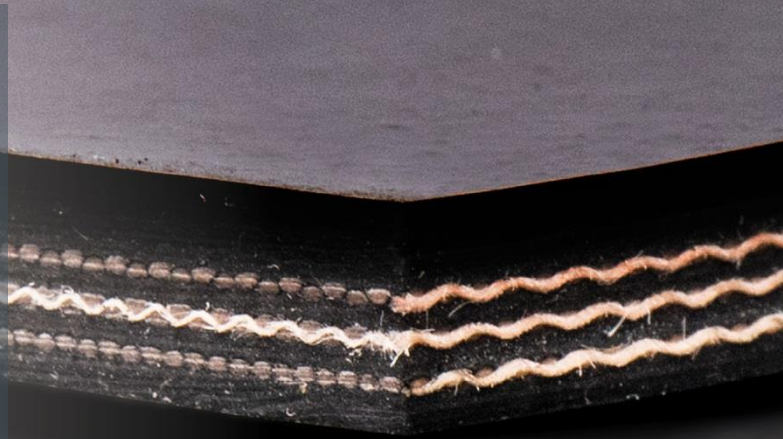

SPEC	FACTS
Tensile strength N/mm	400
Recommended max. working load N/mm	40
Covers mm	4+2
Quality designation	OIL-GS-K
Rubber quality covers	NBR
Rubber quality core	NBR
Colour	Black
No. of fabrics	3
Fabric type	EP125
Warp	Polyester
Weft	Polyamid
Elongation max. %	1,5
Total thickness app. mm	9,0
Weight kg/m ² app.	10,4
Min. pulley Ø 60-100% utilization of working load	315
Min. pulley Ø 30-60% utilization of working load	250
Min. pulley Ø < 30% utilization of working load	200
Smaller pulleys	Please contact us

Skandinavisk Båndkompagni A/S

Birkegårdsvej 34A • DK 8361 Hasselager • Tel. +45 8734 7080 • info@sbk-belt.dk www.sbk-belt.dk

Subject to alterations.