




IND- OG AFTRUGNING

STANDARDVÆRDIER FOR IND- OG AFTRUGNINGS LÆNGDER

(Minimum længder for ind og aftrugning med 3-SEKTIONERS rullestel)

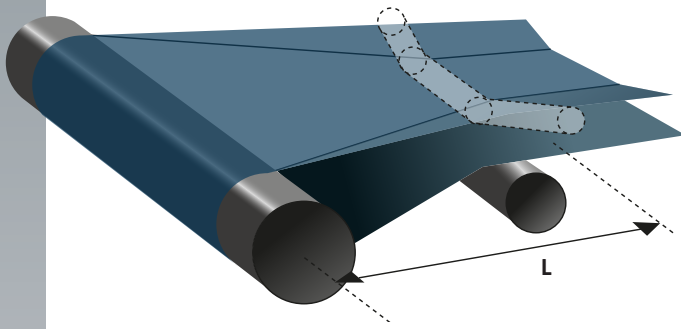

MINIMUM IND OG AFTRUGNING LÆNGDE (mm)			
FIG. 1 PÅ LINIE	0 - 60 %	60 - 90 %	> 90 %
20°	1,2 x B	1,6 x B	1,8 x B
25°	1,8 x B	2,4 x B	2,8 x B
30°	1,9 x B	2,6 x B	3,0 x B
35°	2,1 x B	2,8 x B	3,2 x B
45°	2,4 x B	3,2 x B	4,0 x B
FIG. 2 HÆVET	0 - 60 %	60 - 90 %	> 90 %
20°	0,6 x B	0,9 x B	1,2 x B
25°	1,2 x B	1,4 x B	1,8 x B
30°	1,2 x B	1,6 x B	1,9 x B
35°	1,4 x B	1,8 x B	2,1 x B
45°	1,6 x B	2,0 x B	2,4 x B

B = Båndbredde

TROMLE HÆVES 1/3 AF TRUGDYBDE (mm)									
TRUG VINKEL	500	650	800	1.000	1.200	1.400	1.600	1.800	2.000
20°	17	23	28	35	42	50	57	64	71
25°	21	28	34	44	52	61	70	80	88
30°	22	31	36	48	56	68	78	89	100
35°	29	38	46	59	70	83	96	108	119
45°	-	40	47	62	72	87	100	114	127

FIG. 1

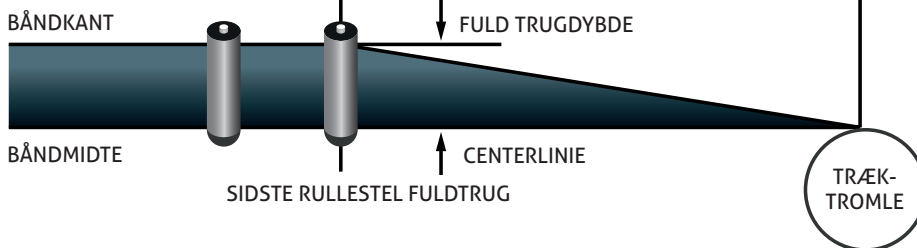


FIG. 2

