
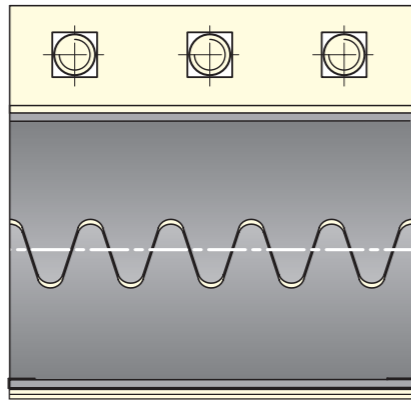


COMPRESSION COUPLINGS ARE USED IN PNEUMATIC CONVEYING, VACUUM OR PRESSURE SYSTEMS TO HANDLE LIGHTER BULK MATERIALS.

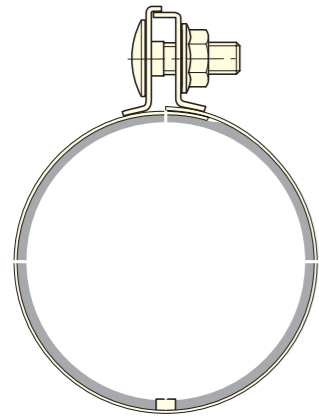

SPECIFICATION OF STANDARD COUPLING:

- Outside skin in stainless steel 430
- Black SBR gasket -30°C/+80°C
- Zinc plated bolts
- Stainless steel 304 L, conductivity strip

OTHER OPTIONS:

- All stainless steel 304L version
- White NBR gasket FDA -30°C/+110°C ; European Regulation 1935/2004 CE and REACH 1907/2006 CE
- Silicone VMQ gasket -65°C/+225°C
- Viton FPM gasket -20°C/+250°C
- Coupling with clamp and side bars (see example)
- Coupling for two tubes with different diameters (see example)
- Conductivity strip in copper CU A1
- Conductive protecting ring in stainless steel 304L (see example)



Reference to regulation N° 97/23/CE.G2 Art. 3 §3

Product marking

Example: **EURAC[®] M D 63,5**

L	150 mm
Ø	38.1<>114.3 mm
BOLTS	M8
TIGHTENING	16 N/mm


MAX. PRESSURE CURVE FOR EURAC M150

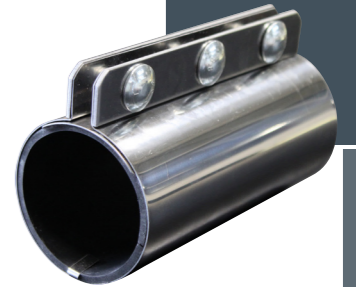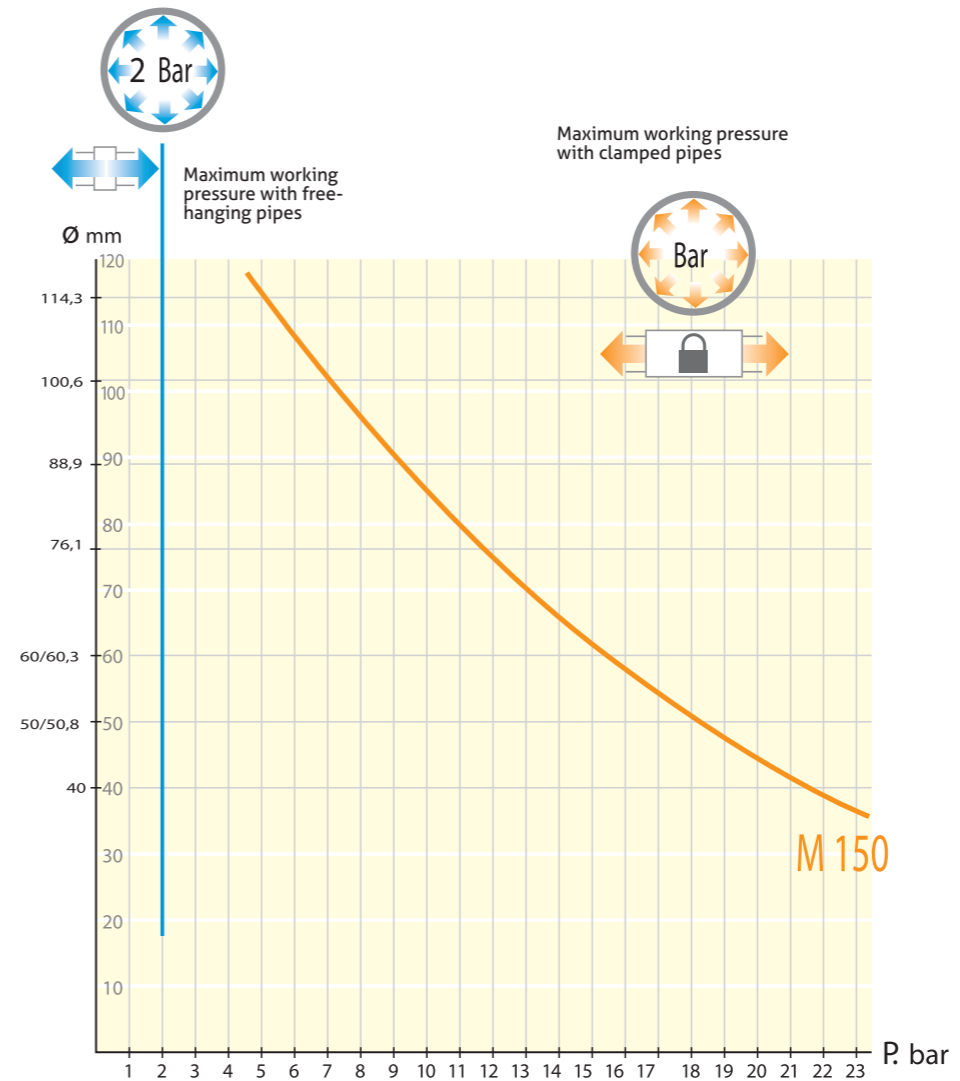

Ø	L 150
38,1	
40	
45	
50/50,8	
54	
55	
60/60,3	
63,5	
65	
70	
75	
76,1	
80	
82	
84	
85	
88,9	
90	
95	
100	
101,6	
104	
105	
108	
114,3	

OPTIONS:


- Coupling with clamp and side bars



- Conductive protection ring in stainless steel 304L



- Coupling for two tubes with different diameters



Standard types

Order specific
Other diameters can be offered