


# SBK



## SELECTION DRIVE- AND END PULLEYS – ELEVATOR BELTS

Choosing the correct pulley diameter, more aspects must be taken into consideration.

Most important is the calculated belt strength required for the specific job.

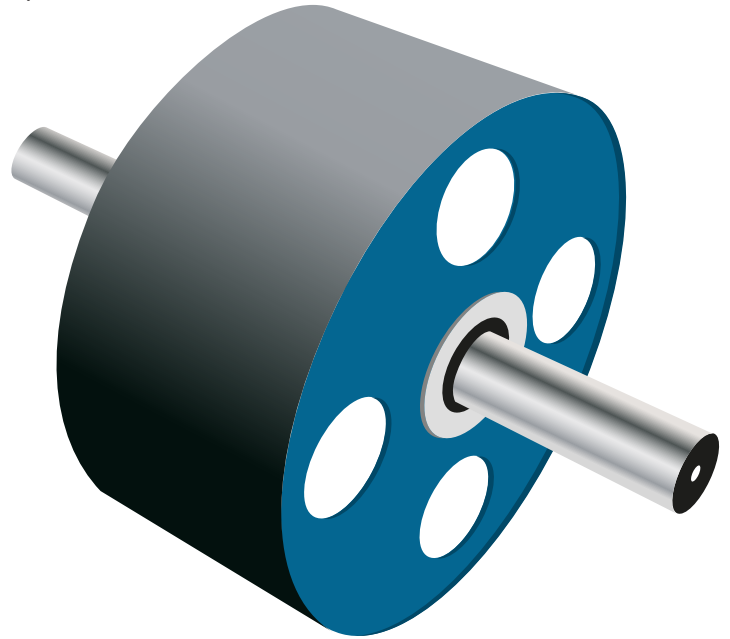

To secure long belt service life, we recommend you to follow the values stated in the table below:

BELT TYPE	Rate of utilization of the maximum permissible belt force		End pulley
	65-100%	Less than 65%	
EP 315/3	Ø315	Ø250	Ø250
EP 500/3	Ø400	Ø315	Ø315
EP 500/4	Ø500	Ø400	Ø400
EP 630/3	Ø500	Ø400	Ø400
EP 630/4	Ø500	Ø400	Ø400
EP 630/5	Ø500	Ø400	Ø400
EP 800/4	Ø630	Ø500	Ø500
EP 800/5	Ø630	Ø500	Ø500
EP 1000/4	Ø800	Ø630	Ø630
EP 1000/5	Ø800	Ø630	Ø630
EP 1250/4	Ø800	Ø630	Ø630
EP 1250/5	Ø800	Ø630	Ø630
EP 1600/4	Ø1000	Ø800	Ø800
EP 1600/5	Ø1000	Ø800	Ø800

For smaller pulleys please contact us

**Skandinavisk Båndkompagni A/S**

Birkegårdsvej 34A • DK 8361 Hasselager • Tel. +45 8734 7080 • info@sbk-belt.dk • www.sbk-belt.dk

*Subject to alterations*