

PULLEY DIAMETERS CHEVRON BELTING

RECOMMENDED MINIMUM PULLEY DIAMETER FOR STANDARD CHEVRON BELTING

Chevron and belt cover vulcanized in one process

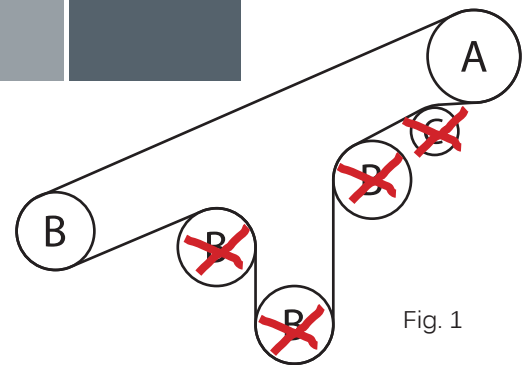


Fig. 1

TYPE	BELT TYPE	EP 250/2		EP 400/3		EP 500/4		EP 630/4	
	QUALITY	Y	OTHER QUALITIES*	Y	OTHER QUALITIES*	Y	OTHER QUALITIES*	Y	OTHER QUALITIES*
	Ø MIN.	ØA+B mm	ØA+B mm	ØA+B mm	ØA+B mm	ØA+B mm	ØA+B mm	ØA+B mm	ØA+B mm
VML-15		250	315	315	400	400	500	**	**
UML-15		250	315	315	400	400	500	**	**
VMUL-14		250	315	315	400	400	500	**	**
VMUL-15		250	315	315	400	400	500	**	**
VMLD-15		250	315	315	400	400	500	**	**
VMLO-15		250	315	315	400	400	500	**	**
VMM-25		280	350	350	450	450	630	**	**
VMM-25		280	350	350	450	450	630	**	**
VMMB-25		280	350	350	450	450	630	**	**
VMH-32		315	400	400	500	500	630	630	750

* Other qualities = OIL-GM,OIL-GS, T150 ** Please contact us.

RECOMMENDED MINIMUM PULLEY DIAMETER FOR SPECIAL CHEVRON BELTING

Chevron vulcanized onto the buffed base belt in a separate process

TYPE	BELT TYPE	EP 250/2		EP 400/3		EP 500/4		EP 630/4	
	QUALITY	Y	OTHER QUALITIES*	Y	OTHER QUALITIES*	Y	OTHER QUALITIES*	Y	OTHER QUALITIES*
	Ø MIN.	ØA+B mm	ØA+B mm	ØA+B mm	ØA+B mm	ØA+B mm	ØA+B mm	ØA+B mm	ØA+B mm
VMLS-15		280	350	400	480	500	600	**	**
VMLSB-15		280	350	400	480	500	600	**	**
SA-15		280	350	400	480	500	600	**	**
SB-470/15		280	350	400	480	500	600	**	**
YLS-15		280	350	400	480	500	600	**	**
VMMS-20		330	400	450	500	550	650	**	**
VMMS-25		330	400	450	500	550	650	**	**
MD-420/20		330	400	450	500	550	650	**	**
MD-550/20		330	400	450	500	550	650	**	**
MD-610/25		330	400	450	500	550	650	**	**
LE-350/35		400	480	480	600	600	650	630	700
LE-450/35		400	480	480	600	600	650	630	700
LE-570/35		400	480	480	600	600	650	630	700
VMHS-30		400	480	500	600	600	650	750	800
VMHS-50		430	480	550	650	630	700	800	900

* Other qualities = OIL-GM,OIL-GS, T150 ** Please contact us..

Snub pulley and gravity take up as shown in Fig. 1 is not recommend for chevron- and profile belting, if the height of the profile exceeds 6 mm. Please contact us for further information.

Skandinavisk Båndkompagni A/S

Birkegårdsvej 34A • DK 8361 Hasselager • Tel. +45 8734 7080 • info@sbk-belt.dk • www.sbk-belt.dk

Subject to alterations