

# SBK



## SKANKOP EP 315/3 0,3+0,3 OIL-GS



Antistatic acc. to EN ISO 284:2012  
( $\leq 3 \times 10^9$  Ohm)



Abrasion max. 150 mm<sup>3</sup>




Material temperature  
-20°/+100° C (short peaks -30°/+120° C)



Ambient temperature  
Min/max. -20°/+50° C / [See more](#)



Excellent oil resistance to materials containing  
animal, vegetable & mineral oils and fats.

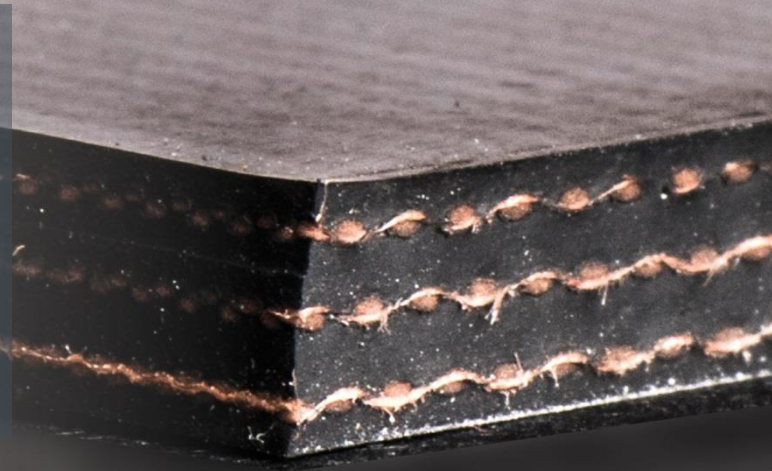

SPECS	FACTS
Tensile strength N/mm	<b>315</b>
Recommended max. working load N/mm	<b>28</b>
Covers mm	0,3+0,3
Quality designation	OIL-GS
Rubber quality covers	NBR
Rubber quality core	NBR
Colour	Black
No. of fabrics	3
Fabric type	EP100
Warp	Polyester
Weft	Polyamid
Elongation max. %	1,5
Total thickness app. mm	4,8
Weight kg/m <sup>2</sup> app.	5,2
Min. pulley Ø 60-100% utilization of working load	315
Min. pulley Ø 30-60% utilization of working load	250
Smaller pulleys	Please contact us

### Skandinavisk Båndkompagni A/S

Birkegårdsvej 34A • DK 8361 Hasselager • Tel. +45 8734 7080 • info@sbk-belt.dk www.sbk-belt.dk

*Subject to alterations.*