

SBK



SKANKOP EP 630/4 2+2 T150



Antistatic acc. to EN ISO 284:2012
($\leq 3 \times 10^8$ Ohm)




Abrasion max. 180 mm³



Material temperature
-30°/+150° C (short peaks -35°/+170° C)



Ambient temperature
Min/max. -20°/+50° C / [See more](#)

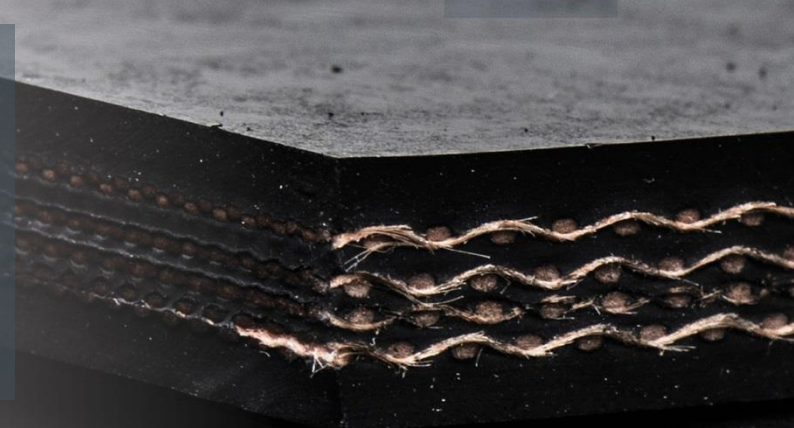

SPECS	FACTS
Tensile strength N/mm	630
Recommended max. working load N/mm	57
Covers mm	2+2
Quality designation	T150
Rubber quality covers	SBR
Rubber quality core	SBR
Colour	Black
No. of fabrics	4
Fabric type	EP160
Warp	Polyester
Weft	Polyamid
Elongation max. %	2,5
Total thickness app. mm	8,5
Weight kg/m ² app.	10,4
Min. pulley Ø 60-100% utilization of working load	500
Min. pulley Ø 30-60% utilization of working load	400
Smaller pulleys	Please contact us

Skandinavisk Båndkompagni A/S

Birkegårdsvej 34A • DK 8361 Hasselager • Tel. +45 8734 7080 • info@sbk-belt.dk www.sbk-belt.dk

Subject to alterations.