SKANPLY EP 400/3 3+0 Supergrip Black

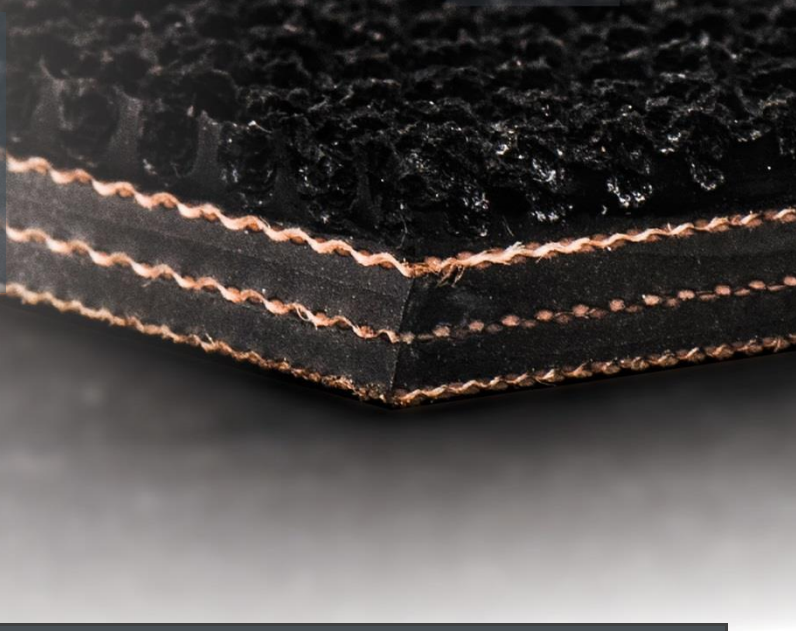

Antistatic acc. to EN ISO 284:2012
(≤3 x 10^8 Ohm)

Material temperature
-30°/+70° C (short peaks -35°/+80° C)

Ambient temperature
Min/max. -20°/+50° C / See more

SPECS	FACTS
Tensile strength N/mm	**400**
Recommended max. working load N/mm	**40**
Covers mm	3+0 – supergrip profile
Quality designation	Y
Rubber quality covers	SBR
Rubber quality core	SBR
Colour	Black
No. of fabrics	3
Fabric type	EP125
Warp	Polyester
Weft	Polyamid
Elongation max. %	1,5
Total thickness app. mm	7,0
Weight kg/m² app.	8,3
Min. pulley Ø 60-100% utilization of working load	315
Min. pulley Ø 30-60% utilization of working load	250
Min. pulley Ø < 30% utilization of working load	200
Smaller pulleys	Please contact us

Skandinavisk Båndkompagni A/S
Birkegårdsvej 34A • DK 8361 Hasselager • Tel. +45 8734 7080 • info@sbk-belt.dk www.sbk-belt.dk

Subject to alterations.