

SBK



SKANPLY EP 400/3 4+2 Y



Antistatic acc. to EN ISO 284:2012
($\leq 3 \times 10^8$ Ohm)




Abrasion max. 150 mm³



Material temperature
-30°/+70° C (short peaks -40°/+80° C)



Ambient temperature
Min/max. -20°/+50° C / [See more](#)

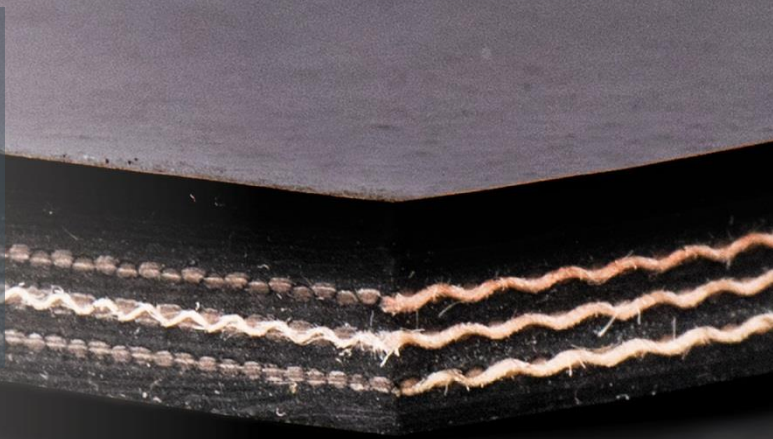

| SPECS | FACTS |
|---|-------------------|
| Tensile strength N/mm | 400 |
| Recommended max. Working load N/mm | 40 |
| Covers mm | 4+2 |
| Quality designation | Y |
| Rubber quality covers | SBR |
| Rubber quality core | SBR |
| Colour | Black |
| No. of fabrics | 3 |
| Fabric type | EP125 |
| Warp | Polyester |
| Weft | Polyamid |
| Elongation max. % | 1,5 |
| Total thickness app. mm | 9,0 |
| Weight kg/m ² ca. | 10,4 |
| Min. pulley Ø 60-100% utilization of working load | 315 |
| Min. pulley Ø 30-60% utilization of working load | 250 |
| Min. pulley Ø < 30% utilization of working load | 200 |
| Smaller pulleys | Please contact us |

Skandinavisk Båndkompagni A/S

Birkegårdsvej 34A • DK 8361 Hasselager • Tel. +45 8734 7080 • info@sbk-belt.dk www.sbk-belt.dk

Subject to alterations.