

SBK



SKANKOP DUOPLY 1250/2 1+3 ATEX-FDA-OIL-GS



Antistatic acc. to EN ISO 284:2012
($\leq 3 \times 10^8$ Ohm)



Abrasion max. 200 mm³



Material temperature
-20°/+80° C (short peaks -25°/+90° C)



Ambient temperature
Min/max. -20°/+50° C / [See more](#)




Max oil resistant for materials with animal,
vegetable & mineral oils



In accordance with EC 1935-2004



Flame resistant acc. to ISO340 "K"

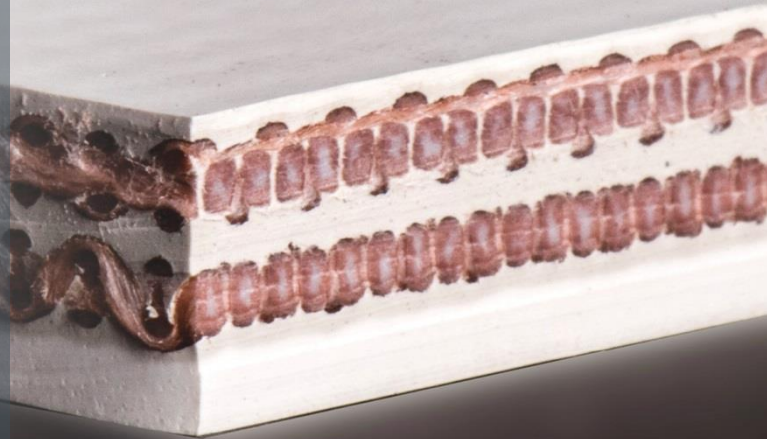

SPECS	FACTS
Tensile strength N/mm	1250
Recommended max. working load N/mm	113
Covers mm	1+3
Quality designation	ATEX-FDA-OIL-GS
Rubber quality covers	NBR/PVC
Rubber quality core	NBR/PVC
Colour	White
No. of fabrics	2
Fabric type	SW630
Warp	Polyester
Weft	Polyamid
Elongation max. %	0,8
Total thickness app. mm	9,8
Weight kg/m ² app.	12,7
Min. pulley Ø 60-100% utilization of working load	1000
Min. pulley Ø 30-60% utilization of working load	800
Smaller pulleys	Please contact us
IMPORTANT !	At the assembly, the thick side of the belt (3 mm) must face the pulley



Skandinavisk Båndkompagni A/S

Birkegårdsvej 34A • DK 8361 Hasselager • Tel. +45 8734 7080 • info@sbk-belt.dk www.sbk-belt.dk

Subject to alterations.